

THERMAL PERFORMANCE CERTIFICATE


PRODUCT: 5STARS TILT & TURN WINDOW

GLAZING: TRIPLE GLAZING 44MM (CS1.0 4 + F4 + LOWE 1.0 4) ARGON + WARM EDGE SPACER

CUSTOMER:

PROJECT:

Width L = 1230mm
Height H = 1480mm

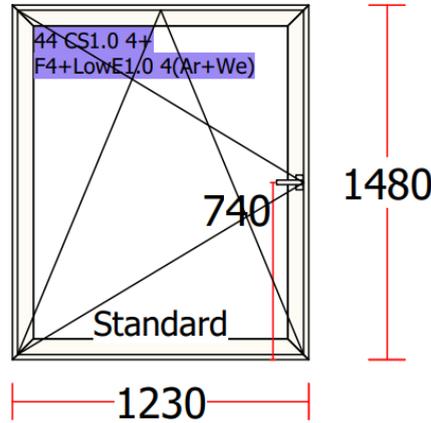

THERMAL TRANSMITTANCE CALCULATION

Profile	$U_f = 1.9 \text{ W/m}^2\text{k}$
Triple Glazing	$U_g = 0.5 \text{ W/m}^2\text{k}$
Spacer	$I_p = 0.04 \text{ W/m}^2\text{k}$
Total profile surface	$A_f = 0.44 \text{ m}^2$
Glazing surface	$A_g = 1.38 \text{ m}^2$
Total triple glazing perimeter	$I_g = 4.72 \text{ m}$
Joinery Surface	$A_w = 1.82 \text{ m}^2$

All thermal calculations carried out in accordance with BS EN ISO 1077 – 1 : 2018. Thermal performance of windows, doors, and shutters – calculation of thermal transmittance

The U_w and U_g values may vary depending on the glazing used and on the windows' dimensions

$$U_w = \frac{U_f \times A_f + U_g \times A_g + I_p \times I_g}{A_w}$$

RESULT

$U_w = 0.96 \text{ W/m}^2\text{k}$

APPROVED BY: CONSTANTIN ENUICA
TECHNICAL DIRECTOR, QFORT
DATE: MAY 2024